

Spring Force (xx)

Preload	Rated Force	Code xx
0,4 N	1,0 N	10
0,4 N	1,5 N	15
0,45 N	2,0 N	20



Ø 0,60 **141.102.06.10**




Ø 0,60 **141.05.06.10**



**For XXLlonglife-Nanocoating
order as 141X**

Series 141

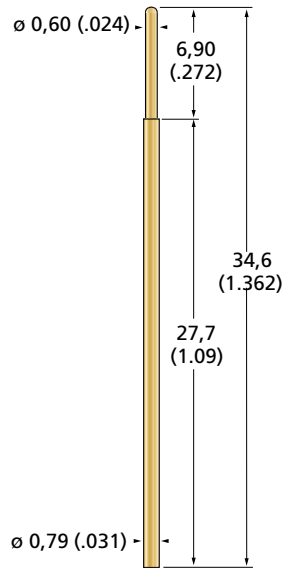

Series 141

Technical Data


Overall Length	34,6 mm
Minimum Centre Spacing	1,27 mm
Maximum Travel	6,35 mm
Working Travel	4,20 mm
Temperature Range from	-55°C
Up to	+120°C
Typical Resistance	25 mΩ
Current Load rated/max.	2,0 / 3,0 A

Materials

Plunger	CuBe or steel, gold plated
Barrel	Cu-alloy, gold plated
Spring	Music wire, gold plated or silver plated


S 141.00-C

Open Crimp End

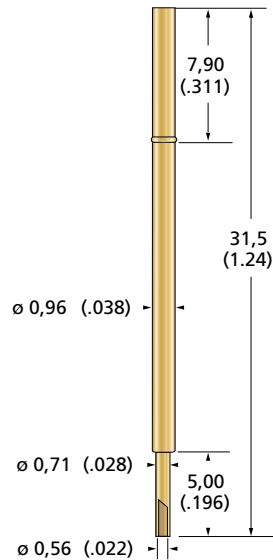


S 141.00-L

Solder Cup

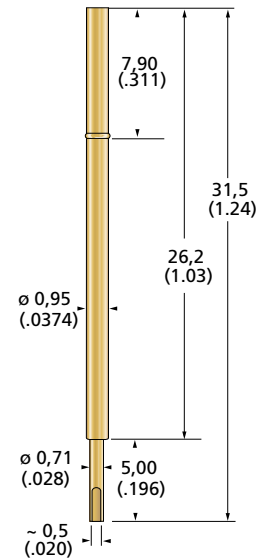

FIXTURING EXAMPLE

Series 141 in S 141.00-L

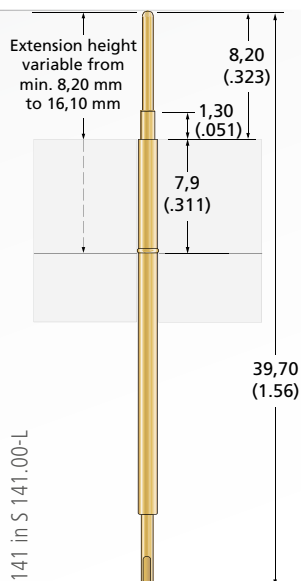

ICT / FCT
TEST PROBES

