


Spring Force (xx)

Preload	Rated Force	Code
		xx
1,0 N	1,5 N	15
1,2 N	3,0 N	30
3,0 N	5,0 N	50



Ø 3,30 **60.05.33.xx**

Ø 3,50 **60.05.35.xx**




Ø 3,00 **60.08.30.xx**

Ø 4,00 **60.08.40.xx**



For XXLonglife-Nanoplating order as 60X

SERIES 60

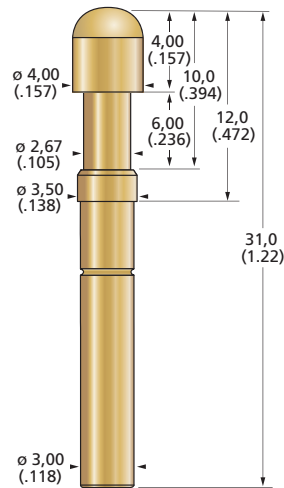

SERIES 60

Technical Data


Overall Length	31,00 mm
Minimum Centre Spacing	4,50 mm
Maximum Travel	6,00 mm
Working Travel	4,00 mm
Temperature Range from	-55°C
Up to	+120°C
Typical Resistance	20 mΩ
Current Load rated/max.	4,0 / 5,0 A

Materials

Plunger	CuBe hardened, gold plated
Barrel	Brass, gold plated
Spring	Music wire, silver plated

S 60.00-LO

Open end with solder tail

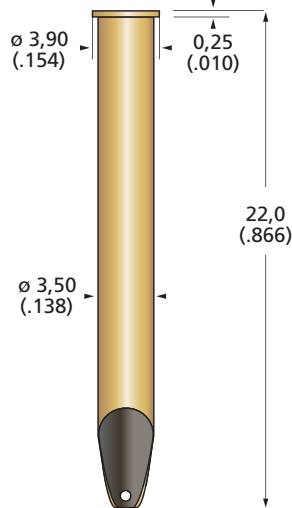

Spring Force (xx)

Preload	Rated Force	Code
		xx
1,0 N	1,5 N	15
1,2 N	3,0 N	30
3,0 N	5,0 N	50




Ø 4,00 **61.08.40.xx**



For XXLonglife-Nanoplating order as 61X

SERIES 61

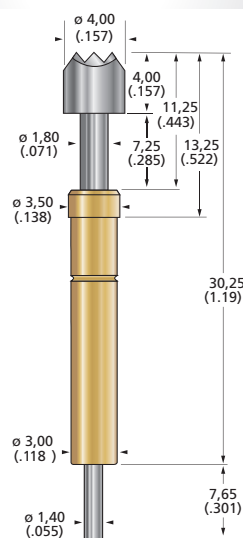

SERIES 61

Technical Data

Overall Length	37,95 mm
Minimum Centre Spacing	4,50 mm
Maximum Travel	7,00 mm
Working Travel	4,00 mm
Temperature Range from	-55°C
Up to	+120°C
Typical Resistance	10 mΩ
Current Load rated/max.	12,0 / 16,0 A

Materials

Plunger	CuBe, rhodium plated
Barrel	Brass, gold plated
Spring	Music wire, silver plated

As the series 51 the series 61 has a pass-through plunger. Plug-on terminal S-T 61.10 available.